





Terrazzo

Terrazzo, born from Venetian ingenuity, transforms marble fragments into a mosaic of color and texture—an upcycled material with timeless romance. Honed, polished, or brushed, it brings warmth and sophistication to any indoor or outdoor space.

Our Terrazzo Collection combines beauty with performance, offering durable floors, walls, countertops, and custom designs in a variety of sizes—perfect for projects that demand both elegance and longevity.

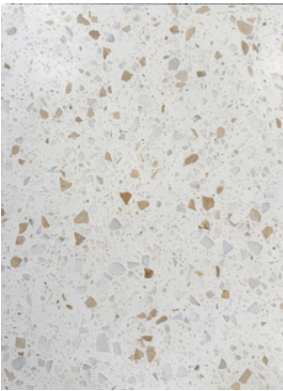

Skyline

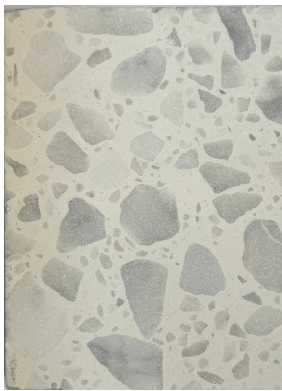

Carrara



Verde



Miele




Arenaria




Pomodoro



Kona

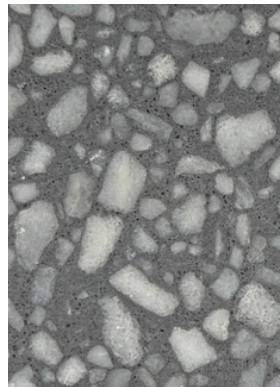

Nebbia

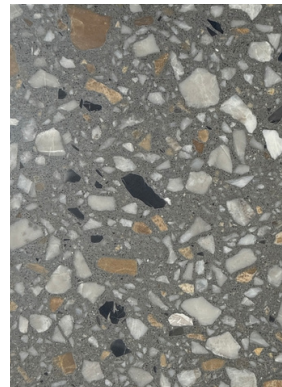

Ceppo



Lava

STANDARD FORMAT - CUSTOMIZATION AVAILABLE:

FIELD SIZES: 24x24 / 32x32

THICKNESS: 3/4


FINISHES: HONED / POLISHED / BRUSHED

50+ colors available, minimum quantities required

Terrazzo

No.	Test Item(s)	Test Method(s)	Test Condition	Test Result(s)
1	DCOF Coefficient of Friction	JGJ/T 331-2014 & GB/T 4100-2015 Annex M	200mmx200mmx20mm 3pcs, one face polished	Dry Condition: .67 Wet Condition: .47
2	Water Absorption	JC/T 908-2013(2017) Section 7.6 & GB/T 3810.3-2016	200mmx200mmx20mm 5pcs, one face polished Vacuum method	0.24%
3	Breaking Strength	JC/T 908-2013(2017) Section 7.9 & GB/T 9966.1-2001	50mmx50mmx20mm 10pcs, one face polished	Dry: 18,275 psi Wet: 20,305 psi
4	Abrasion Resistance	JC/T 908-2013(2017) Section 7.10 & Annex C	150mmx100mmx20mm 6pcs, one face polished	Average Volume Loss: 0.036 cubic inches

NOMINAL SIZES



32x32

80cmx80cm
2cm



24x24

60cmx60cm
2cm

Due to natural variations in materials, the color and appearance of manufactured terrazzo tile may vary slightly from the swatches shown. Computer screens and tear sheet images may not accurately reflect the final production color or finish.

Custom colors and sizes are available upon request.

Installation Instructions

Our large format terrazzo tiles require the following to ensure their performance:

A dry, clean concrete slab (handheld moisture reading of <10% is acceptable). No curing compounds. (It may be necessary to use a primer if there is something on the slab).

A crack isolation membrane is highly recommended to prevent crack transfer. In the case of new or fine-line cracks, Custom Building Products recommends RedGuard in liquid form. Apply at the rate consistent for a commercial stone floor – 35 sf per gallon (this is 2-coats). If the concrete is older and has numerous cracks or larger open cracks, then pack the joints with the RedGuard membrane, and then use RedGuard Matt instead. This will help dissipate energy.

For a mortar, we recommend Custom Building Products Pro Lite White. This is an ANSI 118.15TE rated mortar that bonds well and has the ability to not sag or slump. The adhesive must be combed out using a 3/4" square notch trowel on the substrate and on the back of the tile. 100% coverage is the target. The keys in the notch should line up to not entrap air. DO NOT USE A DOT METHOD FOR ADHESION ON THE BACK. Wipe the tile as it is placed so as not to let the mortar dry on the face.

We recommend self-leveling spacers and suction cups for tiles over 24" in any direction. These tiles are heavy and you will not easily pull them back up. In addition, you do not want to chip edges placing the tiles. 1/8" minimum for a grout joint.

If expansion joints are in the floor, they must be honored.

Allow the mortar to cure for 48 hours before sealing and grouting. Do not leave the floor ungrouted for more time than necessary to grout. No traffic before grouting. We recommend Custom Building Products Prism Grout in lighter colors. Dark colors can fill pores on the surface of the tile leaving residue that must be cleaned.

Tiles should be sealed prior to grouting and after grouting. We recommend Aqua Mix Sealer's Choice Gold for the sealer as it will leave no visible signs. It is ok to pre-seal tiles.

Regardless of the brand, the above products are standards that must be met by another manufacturer. Always choose a single brand for the installation. The following spec is eligible for a 10-year warranty from Custom Building Products. Contact the supplier for the paperwork on the warranty.